

इंटरनेट

मानक

Disclosure to Promote the Right To Information

Whereas the Parliament of India has set out to provide a practical regime of right to information for citizens to secure access to information under the control of public authorities, in order to promote transparency and accountability in the working of every public authority, and whereas the attached publication of the Bureau of Indian Standards is of particular interest to the public, particularly disadvantaged communities and those engaged in the pursuit of education and knowledge, the attached public safety standard is made available to promote the timely dissemination of this information in an accurate manner to the public.

“जानने का अधिकार, जीने का अधिकार”

Mazdoor Kisan Shakti Sangathan

“The Right to Information, The Right to Live”

“पुराने को छोड़ नये के तरफ”

Jawaharlal Nehru

“Step Out From the Old to the New”

IS 8324 (1988): Code of Practice for Safe use and Maintenance on Non-calibrated Round Steel Link Lifting Chains and Chin Slings [MED 14: Cranes, Lifting Chains and Related Equipment]



“ज्ञान से एक नये भारत का निर्माण”

Satyanarayan Gangaram Pitroda

“Invent a New India Using Knowledge”



“ज्ञान एक ऐसा खजाना है जो कभी चुराया नहीं जा सकता है”

Bhartrhari—Nitiśatakam

“Knowledge is such a treasure which cannot be stolen”

BLANK PAGE



Indian Standard

CODE OF PRACTICE FOR SAFE USE AND MAINTENANCE ON NON-CALIBRATED ROUND STEEL LINK LIFTING CHAINS AND CHAIN SLINGS

(First Revision)

1. Scope — Gives guidance for the selection, use, inspection, testing, maintenance and repair of non-calibrated round steel short link chains and chain slings.

2. Definitions

2.1 Working Load Limit (WLL) — The maximum mass which a sling is designed to support in general service.

2.2 Working Load (WL) — The maximum mass which a sling should be used to support in a particular stated service.

2.3 Competent Person — The person who is approved and declared as such under the relevant statutory provisions.

3. Chain Sling Selection

3.0 The principles outlined below relate to the selection of slings for general purpose use, that is, slings having branches of equal nominal reach.

3.1 The working load of the sling selected shall be at least equal to the maximum load to be lifted. This working load will be the same as the working load limit in normal circumstances or less than the working load limit under certain conditions.

3.2 The working load limit is marked on the sling and is determined by:

- a) the size and grade of chain selected,
- b) the geometry of the sling, and
- c) the method of rating.

3.2.1 Size and grade of chain selected (see Table 1) — It will be noted that as the grade of chain selected increases from M to S to T, chain slings of progressively smaller nominal size can be used to achieve equivalent strength, for example, Grade T sling will have twice the working load limit of Grade M sling of the same size.

3.2.2 Geometry of the sling — It means the number of chain branches and, in the case of multi-branch slings, the included angle between them or the angle to the vertical. Included angles or angles to the vertical should be assessed as illustrated in Table 2. The greater the included angle between the branches, the lower the load a particular sling can carry without exceeding the permissible loading in the branches (see Fig. 1). Each situation should be checked to ensure that the permissible loading in any branch is not exceeded. The use of the sling branches at angles greater than 60° to the vertical (included angles of greater than 120° for two or four-branch slings) is not recommended.

3.2.3 Method of rating

3.2.3.1 Rating with a symmetrically distributed load — There are two methods of rating to determine WLL, the uniform load method and the trigonometric method. Details of both methods are given in Indian Standard 'Specification for forged steel components for use with grade T (8) chains and chain slings assembled by methods other than welding (under preparation)'.

Note — It is strongly recommended that only one of these methods be adopted in any given premises where slings are in use.

Adopted 9 August 1988


© August 1989, BIS

Gr 5

TABLE 1 GRADE OF SHORT LINK CHAIN DESIGNED FOR USE IN CHAIN SLINGS

(Clause 3.2.1)

Grade	Indian Standard	Mean Stress at Working Load Limit (WLL) MPa (N/mm ²)	Mean Stress at Proof Force (F _e) MPa (N/mm ²)	Mean Stress at Minimum Breaking Force (F _m) MPa (N/mm ²)	Ratio of F _m /WLL
M(4)	IS : 3109 (Part 1)-1982 'Specification for short link chain, grade M(4): Part 1 Non-calibrated load chain for lifting purposes (second revision)'	100	200	400	4 : 1
S(6)	IS : 6217-1982 'Specification for short link chain, grade S(6), non-calibrated for lifting purposes (first revision)'	157.5	315	630	4 : 1
T(8)	IS : 6215-1982 'Specification for short link chain, grade T(8), non-calibrated for lifting purposes (first revision)'	200	400	800	4 : 1

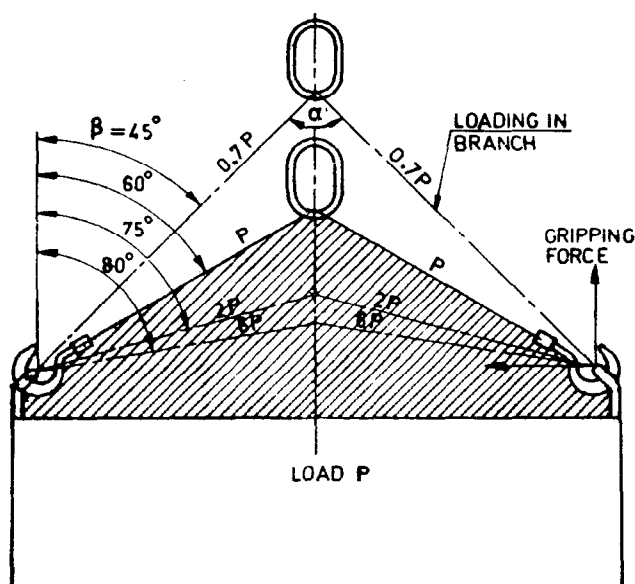

Shaded portion indicates included angles between branches of greater than 120° (60° to the vertical) at which angles, slings should not be used.

FIG. 1 VARIATION OF SLING BRANCH LOADING WITH BRANCH ANGLE FOR A GIVEN LOAD P

3.2.3.1.1 Table 2 shows the factors to be applied for calculating the WLL of multi-branch slings by the uniform load method.

For the trigonometric method, the WLL is calculated from the following formulae:

Double branch sling: $WLL = 2 \times WLL \text{ of single branch} \times \cos \beta$





3×4 branch sling: $WLL = 3 \times WLL \text{ of single branch} \times \cos \beta$

Note — In the case of a four branch sling, if proper measures are taken to achieve the equal distribution of load between each branch, all four branches may be considered as supporting the load. This rating of a four branch sling may, in such circumstances, be based on the formulae:

$$4 \times WLL \text{ of a single branch} \times \cos \beta$$

Tables of WLLs for particular angles are given in Indian Standard 'Specification for forged steel components for use with grade T (8) chains and chain slings assembled by methods other than welding (under preparation)'.

TABLE 2 FACTORS FOR WLL BY UNIFORM LOAD METHOD
(Clauses 3.2.2 and 3.2.3.1.1)

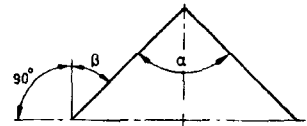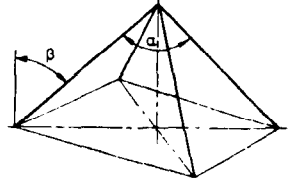Slings							
Number of branches	1	2		3		4	
Angle of inclination	—	90°	120°	—	—	90°	120°
Angle to the vertical	—	45°	60°	45°	60°	45°	60°
Factor for WLL	1	1.4	1	2.1	1.5	2.1	1.5

3.2.3.2 Rating with an asymmetrically distributed load — If it is known that the load is likely to tilt when lifted, there will be a higher tension in the branch nearest to the centre of gravity of the load, that is, the branch where the angle to the vertical (β) is the smallest (see Fig. 2).

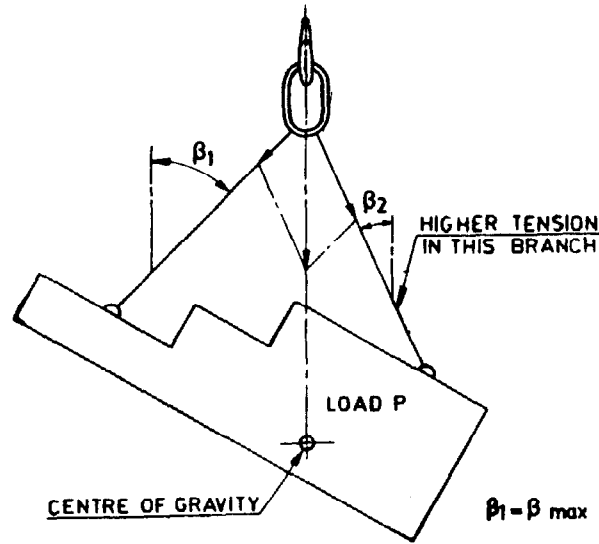


FIG. 2 ASYMMETRIC LOADING

If the sling has to be used under these circumstances (see 4), the following rating factors should be applied:

Uniform load method:

Where β max is 45°

- WLL for double branch = WLL of single branch
- WLL for 3 and 4 branch = WLL of single branch \times 1.4

Where β max is 45° to 60°

- WLL for double branch = WLL of single branch
- WLL for 3 and 4 branch = WLL of single branch

Trigonometric method:

Where β max is $\leq 60^\circ$

WLL for double branch = WLL of single branch $\times 2 \cos \beta$ max

WLL for 3 and 4 branch = WLL of single branch $\times 3 \cos \beta$ max

Note — The use of a sling where any angle β exceeds 60° is not recommended.

3.3 In Adverse Environments — The working load limit should be reduced to a working load in accordance with the following recommendations.

3.3.1 High and low temperature conditions — As the temperature which a chain sling attains in service increases, its strength decreases. Care should be taken to take account of maximum temperature which can be reached by the chain sling in service. This is difficult in practice but under-estimation of the temperature involved should be avoided. The effect of increasing temperature on WL of various grades of chain sling is indicated in Table 3. Chain slings of Grade M(4), S(6) and T(8) will not be adversely affected by temperature down to -40°C and no reduction from WLL is, therefore, necessary on this account. Where chain slings are to be used at temperatures below -40°C , the manufacturer should be consulted.

TABLE 3 WL AS A FUNCTION OF TEMPERATURE $^\circ\text{C}$
(in percent of WLL)*

Grade	- 40 up to + 200	Over 200 up to 300	Over 300 upto 350	Over 350 upto 400	Over 400 up to 475	Over 475
M(4)	100	100	85	75	50	Do not use
S(6)	100	90	75	75	Do not use	
T(8)	100	90	75	75	Do not use	

*The use of chain slings within these temperature ranges does not imply any permanent reduction in WLL when the chain is returned to normal temperatures. If chain slings are accidentally exposed to temperatures in excess of the maximum permissible temperature indicated above, they should be withdrawn from service and referred to the manufacturer.

3.3.2 Acidic conditions

3.3.2.1 Grade S(6) and Grade T(8) — Chain slings manufactured to Grade S(6) or Grade T(8) should not be used either immersed in acid solutions or exposed to acid fumes. Attention is drawn to the fact that certain production processes involve acidic solutions and fumes and the use of Grade S(6) or Grade T(8) slings for lifting in these circumstances should be avoided.

3.3.2.2 Grade M(4) — Chain slings of Grade M(4) may be used in acidic conditions but in the absence of specific recommendations from the manufacturer, the following precautions should be adopted:

- a) The WL of such a sling should not be greater than 50 percent of the WLL,
- b) The sling should be thoroughly washed in clean water immediately after use, and
- c) The sling should be given a thorough examination by a competent person each day before use (see 5).

3.3.3 Other conditions in which the sling is likely to be subjected to attach (chemical, abrasive, etc) — The manufacturer of the sling should be consulted if such conditions apply.

4. Handling the Load

4.1 A lifting chain is usually attached to the load and the lifting device by means of terminal fittings, such as, hooks and links. Chains should be straight, without twists, knots or kinks. The load should be seated well down in a hook, never on the point (see Fig. 3) or wedged in the opening; the hook should be free to incline in any direction so as to avoid bending. For the same reason, the master link should be free to incline in any direction on the lifting device hook. Egg or pear-shaped links should not be used as master links or as lower terminals in any situation where the link could be inverted leading to a wedging action and subsequent distortion of the link.

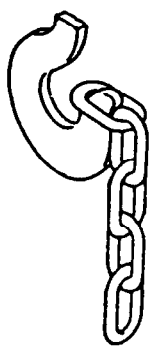


FIG. 3

4.2 The chain may be passed under the load in a basket hitch (see Fig. 4) or choke hitch (see Fig. 5). It is necessary that in the case of a basket hitch where there is a danger of the load tilting, more than one chain sling be applied to the load, preferably in conjunction with a spreader beam (see Fig. 6).

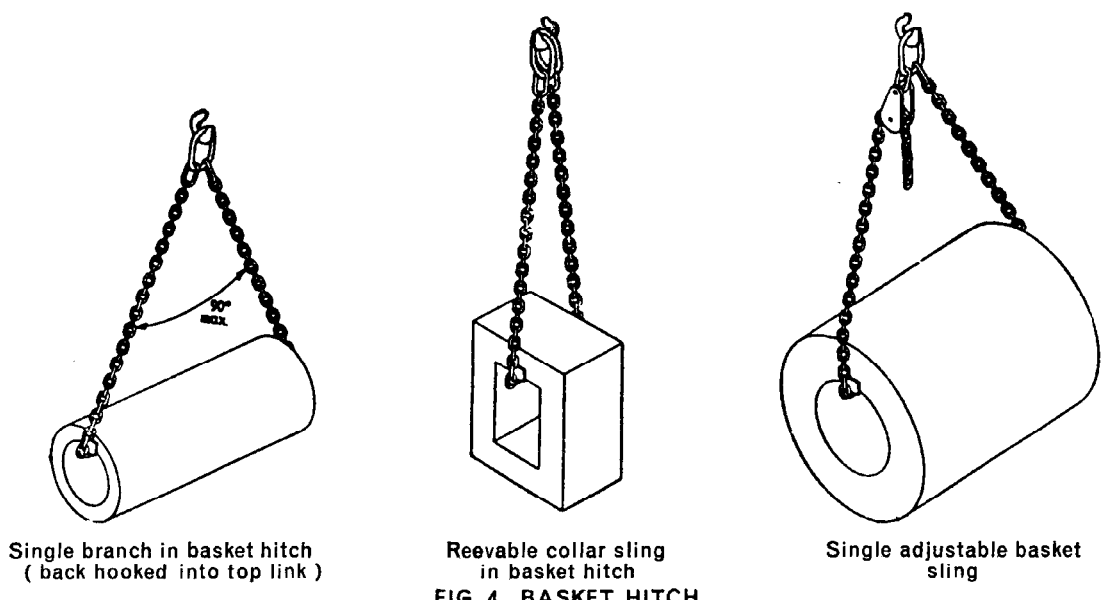


FIG. 4 BASKET HITCH

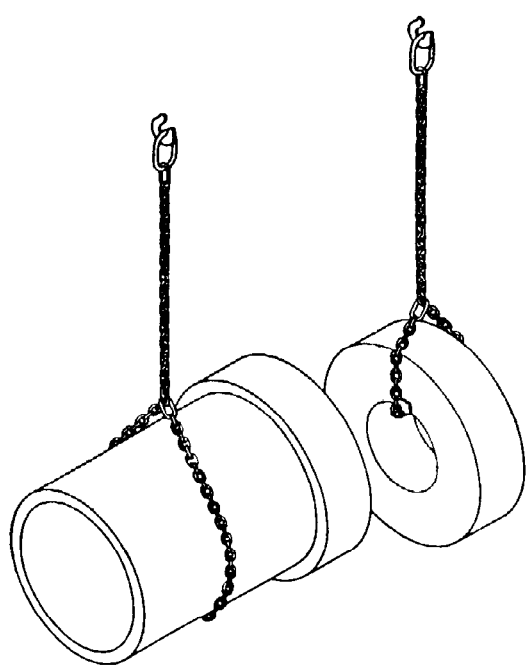


FIG. 5 CHOKE HITCH

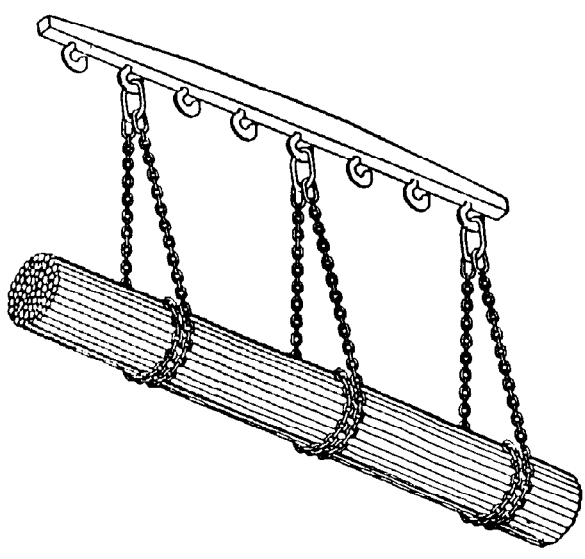


FIG. 6 USE OF SPREADER BEAM

4.3 Damage to a chain may be caused by dragging it from under the load or by rolling a load on to it; these practices should be avoided.

4.4 When a choke hitch is employed, very high tensile forces are imposed and the use of a larger chain for a given load may be necessary. Alternatively, the sling should be derated as recommended by the manufacturer, or national legislation or standards. In the absence of such recommendations or requirements, the WL should not exceed 80 percent of WLL. Care should also be taken to avoid repeated engagement of the terminal fitting in the same link, as this will eventually cause damage.

4.5 All multi-branch slings exert a gripping force (see Fig. 1) on the load which increases as the angle between the sling branches is increased. Where hooks or other fittings are threaded on a loop of chain, for example, case slings and drum slings, the gripping force is much greater and consequently, the angle between such branches should not exceed 60° (30° to the vertical). Care should always be taken to ensure that the load to be moved is able to resist the gripping force without being damaged.

4.6 Packing may be required where a chain contacts a load, to protect either the chain or the load or both. A sharp corner of the hard material may bend or damage the chain links. Conversely, the chain may damage the load because of high contact pressure. Packing, such as wooden blocks, may be used to prevent such damage. Hands and other parts of the body should be kept away from the chain to prevent injury as the slack is taken up.

4.7 A tag line is recommended to prevent swaying or rotation of a load and to position it for landing.

4.8 When ready to lift, the slack should be carefully taken up until the chain is taut, the load raised slightly and a check made that the load is secure and remains level; this is specially important with basket or other loose hitches where friction retains the load. If the load tilts, it should be lowered and the lifting device hook re-positioned towards the low end. This can be accomplished by re-positioning the lifting points or by the use of shortening devices in one or more legs. When all is in order, the lift can proceed.

4.9 The load should be landed carefully. Before slackening the chain, a check should be made that the load is properly supported; this is specially important when several loose objects are in basket hitch and choke hitch.

4.10 When loads are accelerated or decelerated quickly, high dynamic forces occur which increase the stresses in the chain. Such situations which should be avoided, arise from snatch or shock loading, for example, from not taking up the slack chain before starting to lift or by the impact of arresting falling loads.

4.11 Common Malpractices to be Avoided

4.11.1 The following shall be particularly avoided:

- a) Overloading slings and continuing to use chain after it has been stretched by overloading,
- b) Using long link chain (that is, pitch $> 3d$) for lifting,
- c) Using hoist chains as sling chains,
- d) Using components of lower grade than the chain,
- e) Using a sling with any broken or deformed links,
- f) Connecting chain links with bolts or wires (see Fig. 7),
- g) Point loading of hooks (see Fig. 3),
- h) Wrapping the chain several times around a hook (see Fig. 8), and
- j) Using a worn out chain beyond the limits stated in 6.3.



FIG. 7

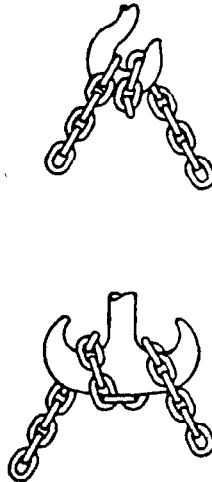


FIG. 8

5. Inspection

5.1 Frequent Inspection — This is a regular visual inspection by the operator or other designated personnel. No records need be kept of such inspections. The chain sling should be examined throughout its working length including all attachments to detect any evidence of wear, distortion or external damage. The frequency of these inspections should be related to severity of the service.

If faults are found during this inspection, the procedure given in 5.2 should be followed.

5.2 Periodic Inspection — This is a thorough examination by a competent person of which records should be made to provide the basis for a continuing evaluation.

Chain slings should be thoroughly cleaned so as to be free from oil and dust prior to inspection. Any cleaning method which does not damage the parent metal is acceptable. Methods to avoid are those that may cause hydrogen embrittlement, overheating, removal of metal or movement of metal which may cover cracks or surface defects.

Adequate lighting, free from shadows, should be provided and the sling examined throughout its length to detect any evidence of wear, distortion or external damage.

The sling should be withdrawn from service for maintenance and repair if any of the following faults are observed:

- a) The sling markings are illegible, that is, information on the sling identification and/or the working load limit.
- b) Distortion of the upper or lower terminal fittings.
- c) *Chain stretch* — If the chain links are elongated or if there is any lack of free articulation between the links or noticeable difference in the branch length of multi-branched slings, the chain may have been stretched. Where possible, as an initial inspection procedure, it is recommended that the actual reach of the sling be measured and recorded. This procedure allows a rapid indication of major deviation from the original product.
- d) *Wear* — Wear by contact with other objects usually occurs on the outside of the straight portions of the links where it is easily seen and measured. Wear between adjoining links is hidden (see 6 and Fig. 9). The chain must be slack and the adjoining links rotated to expose the inner end of each link.
- e) Cuts, nicks, gouges, cracks, excessive corrosion, heat discolouration, bent or distorted links or any other defects in chain or fittings. Shallow and rounded indentations in areas of low tensile stress may not be significant but deep nicks in high tension areas and sharp transverse nicks are unacceptable.
- f) Signs of opening out of hooks, that is, any noticeable increase in throat openings or any other form of distortion in the lower terminal fitting. The increase in throat opening should not exceed 10 percent of the nominal, or be such as to allow the safety catch, if fitted, to become disengaged.
- g) In correct assembly of the mechanical joining devices in slings of non-welded construction (refer to manufacturer's instructions).

6. Maintenance and Repair

6.1 The repair or replacement of individual links, fittings or lengths of chain should only be carried out by the manufacturer or by those organizations which have the necessary knowledge and equipment (such as welding, heat-treatment, proof testing and crack detection facilities).

6.2 Links that are cracked, visibly bent or twisted, severely corroded or have deposits which cannot be removed should be discarded and replaced, as should visibly distorted components.

6.3 Inter-link wear may be tolerated until the thickness of the material at the point of contact (Fig. 9) has been reduced to 80 percent of the nominal diameter ($0.8 d_n$). In those cases where wear occurs at more than one point on the same cross-section, the mean diameter should be measured and such wear may be tolerated until the mean diameter has been reduced to 90 percent of the nominal diameter ($0.9 d_n$).

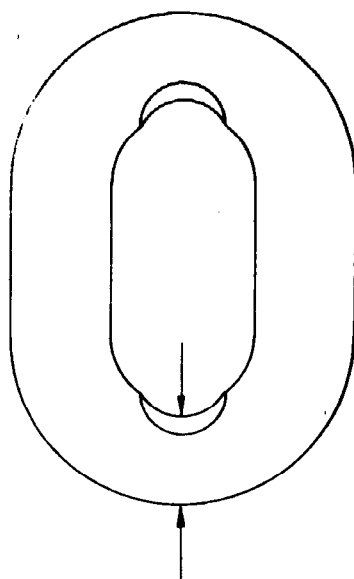


FIG. 9 INTER-LINK WEAR ON LINKS

6.4 Where appropriate, for example, in the case of large hooks and sling fittings, minor defects, such as nicks and gouges, may be removed by careful grinding or filing. Following repair, the surface should blend smoothly into the adjacent material without abrupt change of section. The complete removal of the defect should not reduce the thickness of the section at that point by more than 10 percent.

6.5 In the case of slings whose repair has involved welding, each repaired sling shall be proof tested and inspected before it is returned to use. However, where repair is accomplished by the insertion of a mechanically assembled component, proof testing is not required provided that the component has already been proof tested by the manufacturer.

A proof force has been established for each size and grade of chain sling. These are given in the relevant Indian Standards which should be consulted.

6.6 If the tag or label identifying the sling and its WLL becomes detached and the necessary information is not marked on the master link itself, or by some other means, the sling should be withdrawn from service.

7. Storage and Care of Chain Slings

7.1 Chain slings should normally be kept on a properly designed rack. They should not be left lying on the ground after use where they may be damaged.

7.2 If the chain slings are to be left suspended from a crane hook, the sling hooks should be engaged in an upper link.

7.3 If chain slings are expected to be out of use for some time they should be cleaned (see 5.2), dried and protected from corrosion for example, lightly oiled.

Note — Chain slings should not be galvanized or subjected to any plating processes without the approval of the manufacturer.

8. Record Keeping

8.1 Adequate records are essential for the proper use and maintenance of lifting equipment. The record is a continuous history of the chain sling and should show dates of inspection, testing and maintenance.

8.2 The initial record is a description of the chain sling and its identification markings. Inspection periods and test intervals should be determined and entered in the record.

8.3 After each periodic inspection, the condition of the chain sling should be noted in the record. The results of each proof test should be recorded.

8.4 Each time the sling is repaired the reasons for, and the details of the repairs should be entered in the record.

EXPLANATORY NOTE

This standard first issued in 1976 is being revised to align it with the Draft International Standard ISO/DIS 3056 'Non-calibrated round steel link lifting chain and chain slings — Use and maintenance', issued by the International Organization for Standardization (ISO) which also takes into account the recommendations of International Labour Organization (ILO). It is expected that the guidelines given in this standard will ensure to a much greater degree, the human safety and safe use of the equipment used with these chains.

AMENDMENT NO. 1 JANUARY 2005
TO
IS 8324 : 1988 CODE OF PRACTICE FOR
SAFE USE AND MAINTENANCE ON NON-CALIBRATED
ROUND STEEL LINK LIFTING CHAINS AND
CHAIN SLINGS
(First Revision)

(Page 2, text below Fig. 1) — Substitute the word 'Shaped' by 'Shaded'.

(Page 5, Fig. 4) — Substitute the following for the existing figure:

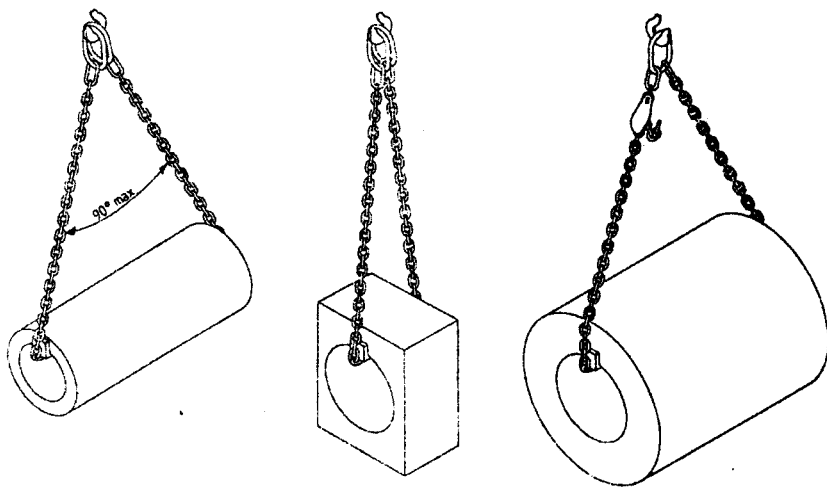


FIG. 4 BASKET HITCH

(ME 14)